

Multifunction

with one Machine



KRL-405 (Horizontal)



KRL-410 (Horizontal/ Vertical)



KRL-420 (Horizontal/ Vertical)




KRL-440 (Horizontal/ Vertical)





Laser type	KRL-405HR	KRL-405HG
Laser type/wavelength	Red laser (635nm-30mw)	Green laser (515nm-30mw)
Leveling way	Electronic leveling (1 gyroscope + 1dual axis electronic sensor)	
Leveling range	$\pm 5^{\circ}$	
Leveling accuracy	$\pm 0.5\text{mm}/10\text{m}$	
Working dia (Using LP500)	$\geq 1000\text{m}$	
Working dia (Using LP700)	$\geq 800\text{m}$	
Working temperature	$-20^{\circ}\text{C} \sim +50^{\circ}\text{C}$	
Laser rotation speed	0/300/600/1000/1500rpm (Permanent magnet brushless hollow motor)	
Area scan	$15^{\circ}/45^{\circ}/90^{\circ}/180^{\circ}$	
Tilt setting	Two-way	
Slope operation	Use the RC100 remote control	
Main unit operation	4 keys /5 lights (Sync with remote control signal)	
Remote control operation	12 keys /5 lights (Synchronize with host signals Remote control distance $\geq 150\text{m}$)	
Power supply method	Lithium (Single section replaceable) AC direct supply	
Lithium working time	15-20H (Longer working time battery for option)	
Calibration method	Remote control /APP	
Packaging	Plastic box	
Size	Length 232 Width 189 Height 227(mm)	
Protection grade	IP65	
Fall height	1M (Main Machine only)	
Setting slop range	$\pm 10\%$	

KRL-405HR



KRL-405HG

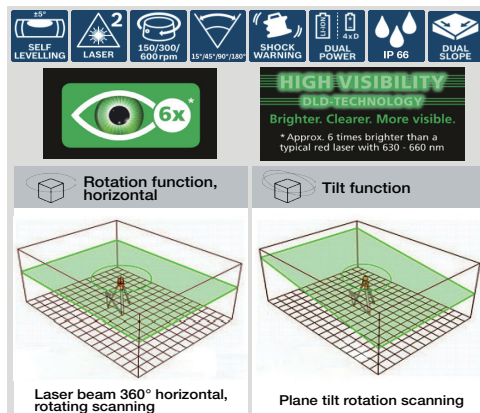



K-LEVEL

LEVEL UP YOUR PRECISION

📞 MOUNTLASER

💬 181 1233 4566

📱 +86-181 1233 4566

✉ M@K-LEVEL.COM

🌐 WWW.K-LEVEL.COM

MOUNT LASER (CHANGZHOU) INSTRUMENT CO.,LTD